



PREMIER - 6



Chassis:	Monoblock. Heavy duty type.
Engine:	Ecological, Deutz make. Four stroke diesel, four cylinders, forced liquid cooling. Power DIN 140 HP to 2400 r.p.m.
Transmission:	Hydrostatic type. Axial pistons pump of variable displacement. Hydraulic motor at axial pistons of variable displacement. Both with automatic regulation through DA valve. Two speeds gear box in both driving directions.
Axles:	Steering type front and rear axle, loading capacity 21.000Kg each.
Steering:	Hydraulic steering operating either on one axle or on both.
Brakes:	- Service: Hydraulic internal disc type in oil bath acting on four wheels. - Parking: Disc type on transmission with hand level control. Reserved brake at stopped engine.
Cabin:	Front closed cabin with windscreen whippers and regulable seat. All controls and levers made by Joy-sitck.
Hydraulic Circuits:	Four different circuits with only one tank: - TRANSMISSION: Hydrostatic circuit cooling through oil-air intercooler - DRUM ROTATION: Hydrostatic circuit - PUM OPERATED STEERING AND BREAKING. - PUM OPERATED SERVICE. With "SELF-CONTROL"


MADRID: Ctra de Valencia, Km 19,200. 28529 RIVAS VACIAMADRID (MADRID). FAX:916701005. e-mail:madrid@mlorenzana.com

LEÓN: Pol. Ind. Villacedré. 24194 VILLACEDRÉ (LEÓN). FAX:987849036. e-mail:leon@mlorenzana.com

VALENCIA: Pol. Ind. El Oliveral C/C, 12. 46190 RIBARROJA DEL TURIA (VALENCIA). FAX:961643073. e-mail:valencia@mlorenzana.com



PREMIER - 6

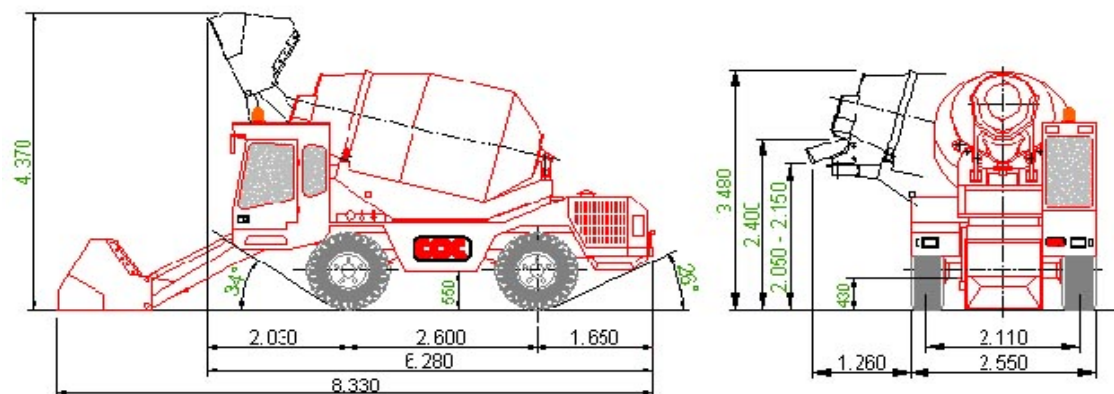

Drum:	Turn on 270° to be able to unload at any point around the machine. Double mixing spiral blade. Inclined drum to facilitate the mixture's unloading. Concrete output capacity.....5 m³ Direct unloading height.....2,40 m Unloading height by chutes.....2,05 m Hydraulic rotating drum for loading-mixing-unloading, with electrical speed regulation.
Loading:	Push type front loading bucket for volumetric dosage with hydraulic unloading door at will. 970L capacity
Water System:	Hydraulic operated self-priming water pump (700 l/min). Litre counter. High pressure water pump for cleaning.
Unloading:	By reversing the rotation of the drum through adjustable pouring chutes if necessary when pouring at distance.
Cycle:	Load and mix 7/10 min
Speed:	1st0 – 10 km/h 2nd0 – 25 km/h
Max. Slope:	Fully loaded: 40%
Steering Radius:	Internal.....2,18 m External.....5,50 m
Electrical Equipment:	12 V battery and all regular lighting devices and signals for road traffic.
Capacities:	Water tank.....1.500 L Oil tank.....200 L Fuel tank.....110 L
Tyres:	18 – 19,5
Weight:	10.500 Kg

MADRID: Ctra de Valencia, Km 19,200. 28529 RIVAS VACIAMADRID (MADRID). FAX:916701005. e-mail:madrid@mlorenzana.com

LEÓN: Pol. Ind. Villacedré. 24194 VILLACEDRÉ (LEÓN). FAX:987849036. e-mail:leon@mlorenzana.com

VALENCIA: Pol. Ind. El Oliveral C/C, 12. 46190 RIBARROJA DEL TURIA (VALENCIA). FAX:961643073. e-mail:valencia@mlorenzana.com

www.mlorenzana.com TEL. 902 151 236