
Full Range



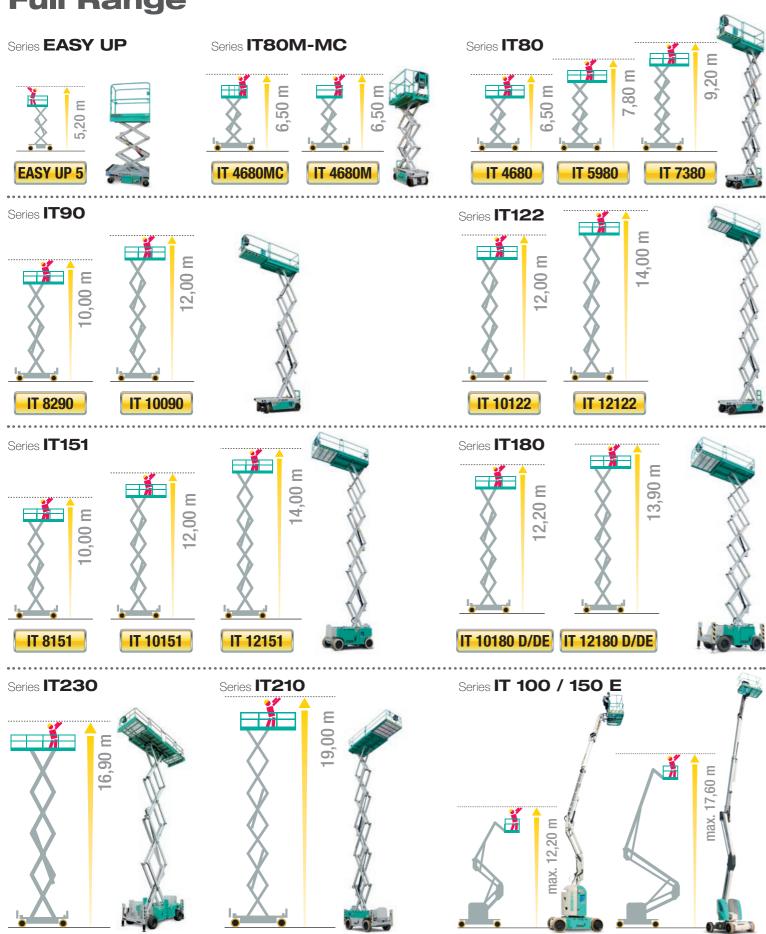

IT 15230 D/DE

IMER International SpA iteco Powered Access Division Via San Francesco d'Assisi, 8 - 46020 Pegognaga (Mantua) Italy Ph. +39 0376 554011 - Fax +39 0376 559855

IT 17210 E

www.imergroup.com - info@imergroup.com
NOTE: the data, descriptions and illustrations are not binding for Imer International S.p.A., which reserves the right to make changes to its products without prior notice.

IT 17210 D

IT 100 E

IT 150 E







2011

NEW





Standard Equipment

- Manual emergency lowering device
- Battery charger with automatic switch-off
- Low battery alert
- Battery switch-off
- Inclinometer with cut out and alarm
- Load sensor with audible/visual motion cut out and alarm
- Electrical scissor protection
- Roller castors with non-marking tyres and parking brake
- Cylinder holding valve Non-slip deck surface
- Full height access gate with spring-lock

Benefits

- ✓ Smooth roller castors with non-marking tyres suitable for soft ground
- ✓ It can be driven through standard doorways and carried in passenger elevators
- \checkmark Ease of transport thanks to fork lift, lifting points and several slinging hook points
- ✓ Outstanding battery capacity provides long endurance
- ✓ Safe and reliable emergency lowering device with pull-up handle
- ✓ Audible alarm on descent
- ✓ Digital inclinometer with cut out and audible alarm when exceeding the allowable tilt angle (no stabilisers
- ✓ Battery charger can be switched on for long periods, ensuring 100% battery charge



All the component parts are easily accessible for servicing



Winching eye for easy transport



Compact design

Auto braking on castors





Removable control allows for easy and safe movement Equipped with key switch and emergency stop button






Functional chassis design for easy cleaning



Safety bean, for use, during maintenance



		EASY UP 5
Number of scissors		3
A	mm	3200
В	mm	5200
С	mm	60
D	mm	1790
E	mm	690
Capacity (including 1 person)	kg	200
Electric motor	kW	1,6
Battery	V/Ah	12/105
Battery charger	V	230
Oil tank capacity	I	2
Lifting time	S	17/17
Max side/longitudinal tilt angle	degrees	1,3/2,5
Total weight	kg	390

